

1

1x  → 1x  + 1x 

 → 1x  + 1x  + 2x  NiMH AAA 400mAh rechargeable*

2

 ↔ min. 1 m ↔ 



 max. 50 m


↔ max. 300 m ↔ 

3

 → 

 **

 → 

 →  **




4

 ON / OFF 

  3sec

 ON / OFF 

  3sec

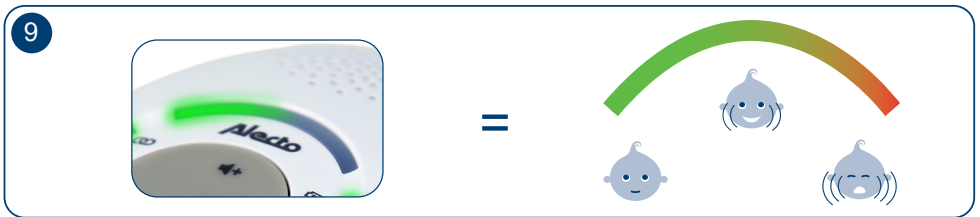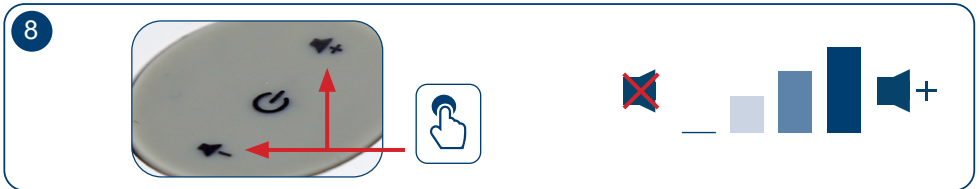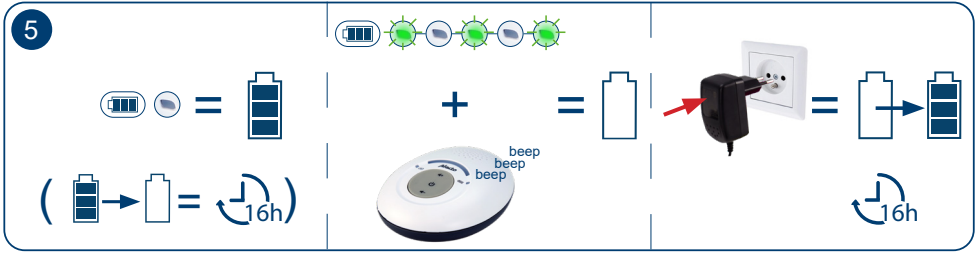

DECLARATION OF CONFORMITY

Hereby, Commaxx declares that the radio equipment type Alecto DBX-115 is in compliance with directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:: <http://DOC.hesdo.com/DBX-115-DOC.pdf>

Use only supplied adapters

Input: 100-240VAC-50/60Hz 150mA
Output: 6V DC 450mA
Model: S003ATV0600045

* Use only rechargeable NIMH battery listed below:
CORUN, Ni-MHAAA400 (Designation No.: Ni-MH AAA 400mAh 1,2V)
Caution: Risk of explosion if battery is replaced by an incorrect type!
Dispose of used batteries according to the instructions.

** For pluggable equipment, the socket-outlet shall be installed near the equipment and shall be easily accessible.
Frequency Range : 1880-1900 Mhz
Maximum Power : < 24 dBm

Information Power Adapter:
Manufacturers name and address:
Vtech Telecommunications LTD, 23/F., Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po, Hong Kong.
Output Power: 2.7 W
Average active efficiency: 74.9 %
Efficiency at low 10% load: -
No load Power consumption: 0.03 W