

# TOTAL


One-Stop Tools Station

TOTAL

**INDUSTRIAL**

**DEMOLITION  
BREAKER  
1300W**

**PRODUCT MANUAL**

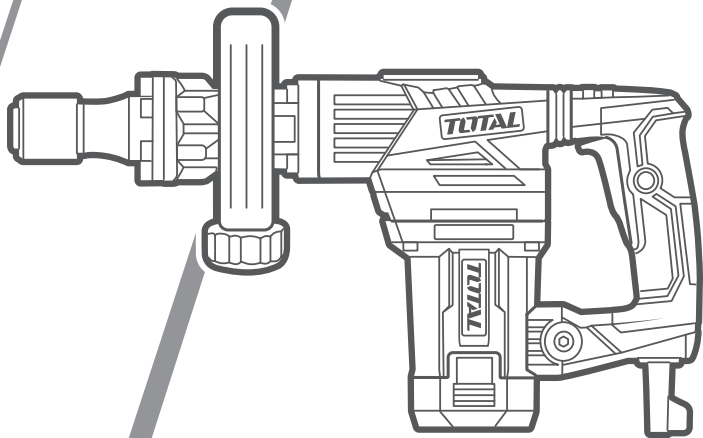

**TH2130016 UTH2130016**  
**TH2130016xy UTH2130016xy**  
**x(blank, 1, 2, 3, 4, 5, 6, 7, 8, 9, E, S, A, M)**  
**y(blank, -1, -2, -3, -4, -5, -6, -7, -8, -9, E, S, A, M)**



**GENERAL POWER TOOL SAFETY WARNINGS**

**⚠ WARNING** Read all safety warnings, instructions, illustrations and specifications provided with this power tool. *Failure to follow all instructions listed below may result in electric shock, fire and/or serious injury.*

**Save all warnings and instructions for future reference.**

*The term "power tool" in the warnings refers to your mains-operated (corded) power tool or battery-operated (cordless) power tool.*

**1) Work area safety**

- a) **Keep work area clean and well lit.** *Cluttered or dark areas invite accidents.*
- b) **Do not operate power tools in explosive atmospheres, such as in the presence of flammable liquids, gases or dust.** *Power tools create sparks which may ignite the dust or fumes.*
- c) **Keep children and bystanders away while operating a power tool.** *Distractions can cause you to lose control.*

**2) Electrical safety**

- a) **Power tool plugs must match the outlet. Never modify the plug in any way. Do not use any adapter plugs with earthed (grounded) power tools.** *Unmodified plugs and matching outlets will reduce risk of electric shock.*
- b) **Avoid body contact with earthed or grounded surfaces, such as pipes, radiators, ranges and refrigerators.** *There is an increased risk of electric shock if your body is earthed or grounded.*
- c) **Do not expose power tools to rain or wet conditions.** *Water entering a power tool will increase the risk of electric shock.*
- d) **Do not abuse the cord. Never use the cord for carrying, pulling or unplugging the power tool. Keep cord away from heat, oil, sharp edges or moving parts.** *Damaged or entangled cords increase the risk of electric shock.*
- e) **When operating a power tool outdoors, use an extension cord suitable for outdoor use.** *Use of a cord suitable for outdoor use reduces the risk of electric shock.*
- f) **If operating a power tool in a damp location is unavoidable, use a residual current device (RCD) protected supply.** *Use of an RCD reduces the risk of electric shock.*

### 3) Personal safety

- a) **Stay alert, watch what you are doing and use common sense when operating a power tool. Do not use a power tool while you are tired or under the influence of drugs, alcohol or medication. *A moment of inattention while operating power tools may result in serious personal injury.***
- b) **Use personal protective equipment. Always wear eye protection. *Protective equipment such as a dust mask, non-skid safety shoes, hard hat or hearing protection used for appropriate conditions will reduce personal injuries.***
- c) **Prevent unintentional starting. Ensure the switch is in the off-position before connecting to power source and/or battery pack, picking up or carrying the tool. *Carrying power tools with your finger on the switch or energising power tools that have the switch on invites accidents.***
- d) **Remove any adjusting key or wrench before turning the power tool on. *A wrench or a key left attached to a rotating part of the power tool may result in personal injury.***
- e) **Do not overreach. Keep proper footing and balance at all times. *This enables better control of the power tool in unexpected situations.***
- f) **Dress properly. Do not wear loose clothing or jewellery. Keep your hair and clothing away from moving parts. *Loose clothes, jewellery or long hair can be caught in moving parts.***
- g) **If devices are provided for the connection of dust extraction and collection facilities, ensure these are connected and properly used. *Use of dust collection can reduce dust-related hazards.***
- h) **Do not let familiarity gained from frequent use of tools allow you to become complacent and ignore tool safety principles. *A careless action can cause severe injury within a fraction of a second.***

### 4) Power tool use and care

- a) **Do not force the power tool. Use the correct power tool for your application. *The correct power tool will do the job better and safer at the rate for which it was designed.***
- b) **Do not use the power tool if the switch does not turn it on and off. *Any power tool that cannot be controlled with the switch is dangerous and must be repaired.***
- c) **Disconnect the plug from the power source and/or remove the battery**







pack, if detachable, from the power tool before making any adjustments, changing accessories, or storing power tools. *Such preventive safety measures reduce the risk of starting the power tool accidentally.*

- d) **Store idle power tools out of the reach of children and do not allow persons unfamiliar with the power tool or these instructions to operate the power tool.** *Power tools are dangerous in the hands of untrained users.*
- e) **Maintain power tools and accessories. Check for misalignment or binding of moving parts, breakage of parts and any other condition that may affect the power tool's operation. If damaged, have the power tool repaired before use.** *Many accidents are caused by poorly maintained power tools.*
- f) **Keep cutting tools sharp and clean.** *Properly maintained cutting tools with sharp cutting edges are less likely to bind and are easier to control.*
- g) **Use the power tool, accessories and tool bits etc. in accordance with these instructions, taking into account the working conditions and the work to be performed.** *Use of the power tool for operations different from those intended could result in a hazardous situation.*
- h) **Keep handles and grasping surfaces dry, clean and free from oil and grease.** *Slippery handles and grasping surfaces do not allow for safe handling and control of the tool in unexpected situations.*

## 5) Service

- a) **Have your power tool serviced by a qualified repair person using only identical replacement parts.** *This will ensure that the safety of the power tool is maintained.*

**THE SYMBOLS IN INSTRUCTION MANUAL**

	Double insulated for additional protection
	Read the instruction manual before using.
	CE conformity.
	Safety alert. Please only use the accessories supported by the manufacturer.
	Wear safety glasses, hearing protection and dust mask.
	Waste electrical products should not be disposed of with household waste. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice.

## ADDITIONAL SAFETY WARNING

- ▶ Wear ear protectors. Exposure to noise can cause hearing loss.
- ▶ Use auxiliary handle(s), if supplied with the tool. Loss of control can cause personal injury.
- ▶ Hold the power tool by insulated gripping surfaces, when performing an operation where the cutting accessory may contact hidden wiring or its own cord. Cutting accessory contacting a "live" wire may make exposed metal parts of the power tool "live" and could give the operator an electric shock.

### Additional Safety Instructions

- ▶ Use suitable detectors to determine if utility lines are hidden in the work area or call the local utility company for assistance. Contact with electric lines can lead to fire and electric shock. Damaging a gas line can lead to explosion. Penetrating a water line causes property damage or may cause an electric shock.
- ▶ Always wait until the power tool has come to a complete stop before placing it down. The application tool can jam and cause you to lose control of the power tool.
- ▶ Secure the workpiece. A workpiece clamped with clamping devices or in a vice is held more secure than by hand.
- ▶ Do not touch any application tools or adjacent housing components shortly after operation. These can become very hot during operation and cause burns.
- ▶ Take care when carrying out demolition work using the chisel. Falling fragments of the demolition material could injure you or any bystanders.
- ▶ Hold the power tool firmly with both hands and make sure you have a stable footing. The power tool can be more securely guided with both hands.

## Product description and specifications


Read all the safety and general instructions.

Failure to observe the safety and general instructions may result in electric shock, fire and/or serious injury. Please observe the illustrations at the beginning of this operating manual.

## INTENDED USE

The power tool is intended for chiseling work in concrete, brick, stone and asphalt, as well as for driving in and compressing with the appropriate accessories.

## SPECIFICATIONS

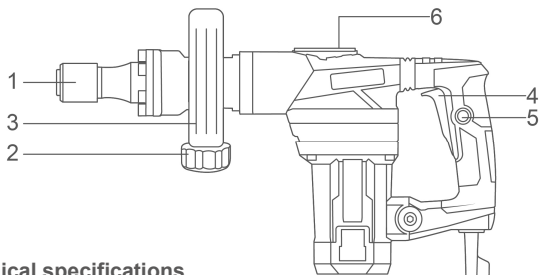







### Technical specifications

Model No.	TH2130016, TH2130016M TH2130016-3, TH2130016-8 (BS Plug) TH2130016-4 (IRAM Plug) TH2130016-6 (ISRAEL Plug) TH2130016-7 (Chile Plug) TH2130016-9 (INMENTRO Plug)	UTH2130016	UTH2130016-9 (INMENTRO Plug)
Rated voltage:	220-240V~50/60Hz	110-120V~50/60Hz	127V~60Hz
Rated input power:	1300W	1300W	1300W
Impact rate:	3800/min	3800/min	3800/min
Impact energy:	20J	20J	20J
Chisel holder:	Hexagon (17 mm)	Hexagon (17 mm)	Hexagon (17 mm)
Machine weight:	7kg	15.4 lbs	15.4 lbs
Protection Class	□ \ II	□ \ II	□ \ II



Guaranteed sound power level LWA in dB

## OPERATION PICTURE




## OPERATION

### Before Use

- Check that the mains voltage corresponds to the rated voltage on the type plate.
- Switch off the product, pull out the plug and wait until all moving parts have completely stopped before adjusting, replacing parts, cleaning and/or carrying out maintenance.
- Check that there are no electrical cables, gas and/or water pipes in the work area.

### Installing or removing the bit (see Figure A)

1. Clean the bit shaft before fitting, and apply a little grease.
2. Press in the bit holder.
3. Insert the bit into the tool holder. Then release it to secure the bit.
4. To remove the bit, follow the installation procedure in reverse.

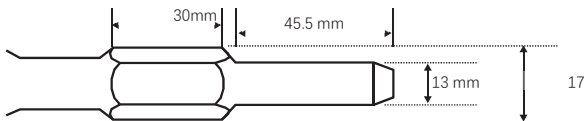

### Adjusting additional handle (see Figure B)

The support handle can be put in the required position and makes it easier to hold the product when working. **ALWAYS** use the support handle.

The support handle can be turned 360° vertically and angled forward and back. Undo the lock nut for the support handle, move the handle to the required position, and tighten the lock nut.

### CAUTION!

**Always make sure that the hammer is switched off and the switch lock is inactive before connecting the hammer to the mains.**

## Switching ON/OFF(see Figure C)

### Switching on:

- Press the On/Off switch 4.
- (With continuous operation function) Press the On/Off switch 4 and depress the switch lock 5.

### Switching off:

- Release the On/Off switch 4.
- (With continuous operation function) Press the On/Off switch 4 and then release.

## Chipping/Scaling/Demolition (see Figure D)

Hold the tool firmly with both hands. Turn the tool on and apply slight pressure on the tool so that the tool will not bounce around, uncontrolled. Pressing very hard on the tool will not increase the efficiency.

### CAUTION!

**Always be sure that the tool is switched off and unplugged before attempting to perform inspection or maintenance. Hold the product firmly with both hands risk of electric shock if the bit comes into contact with live cables.**

## MAINTENANCE

### WARNING!

**Disconnect the mains plug before any adjustment, maintenance or repair.**

Only use spare parts / accessories from the manufacturer or authorized and qualified workshops.

Repairs should only be carried out by qualified technicians or by an authorized service center. Qualified technicians must have relevant training and experience, be familiar with the design and construction requirements of the product and understand and follow the safety regulations.

## Changing / Refilling grease (see Figure E,F)

The machine is completely airtight to prevent grease leaking and dust entering the machine. Refill grease after 30-40 operating hours or when the impact power

decreases.

1. Open the grease cap 6 with the supplied key for grease cap.
2. Refill with the supplied grease and close the cover in reverse order. Refill with gear grease for central lubrication.
3. Spray a small amount of MOS2 oil into the tool holder if you do not intend to use the drill for a longer period of time. This prevents the hammer to seize up.

### **Replacing the carbon brushes**

The carbon brushes may only be replaced by an authorized specialist workshop or by qualified skilled personnel.

### **Replacing the mains cable**

Damaged mains cables may only be replaced with genuine replacement cables available from the manufacturer.

Mains cables may only be replaced by the manufacturer, an authorized service center or a qualified person.

## MAINTENANCE&MALFUNCTIONS

### Possible malfunctions and methods of their eliminations

Malfunction	Probable causes	Actions
When the machine is turned on, the electric motor does not work.	<ul style="list-style-type: none"> <li>● Switch failure</li> <li>● The power cord or wiring is broken, power cord plug malfunction;</li> <li>● No brush contact with the collector;</li> <li>● Wear/damage of brushes</li> </ul>	Disconnect the machine from the mains and contact a qualified specialist.
Formation of a circular fire on the collector	<ul style="list-style-type: none"> <li>● Brush wear/damage of the brush holder;</li> <li>● Malfunction in the armature coil</li> </ul>	Disconnect the machine from the mains and contact a qualified specialist. Please don't repair the machine by your own.
When working, smoke or the smell of burning insulation appears from the ventilation openings.	<ul style="list-style-type: none"> <li>● Malfunction in the electric motor coil;</li> <li>● Malfunction of the electrical part of the tool.</li> </ul>	
Increased noise in the gearbox	<ul style="list-style-type: none"> <li>● Wear/breakage of gears or bearings</li> </ul>	
When the machine is turned on, the spindle does not rotate	<ul style="list-style-type: none"> <li>● Gearbox failure.</li> </ul>	

### Critical state criteria

Critical state criteria	Probable causes	Actions
Cracks on the surfaces of bearing and housing parts	Fatigue deformation of metal	Disconnect the machine from the mains and contact a qualified specialist. Please don't repair the machine by your own.
The power cord or plug is damaged	Overload or breakage	
Excessive wear or damage to the motor or reductor mechanism, or a combination of signs	Fatigue deformation of metal	

### Critical state criteria

List of critical failures	Actions
Electric motor sparking	It is necessary to contact a qualified specialist
The appearance of extraneous noise	It is necessary to contact a qualified specialist
If the above malfunctions are detected, it is necessary to disconnect the machine from the mains and contact a qualified specialist	

# TOTAL

One-Stop Tools Station

[www.totalbusiness.com](http://www.totalbusiness.com)



MADE IN CHINA T0723.V02



TOTAL TOOLS CO., PTE. LTD.

No. 45 Songbei Road, Suzhou Industrial Park, China.

